


DS-2CD2632F-I(S) 3.0MP VF IR Bullet Network Camera



Key features

- Up to 3 megapixel (2048 x 1536) resolution
- Full HD1080p real-time video
- Vari-focal lens
- IR LEDs (up to 30m)
- DWDR & 3D DNR & BLC
- IP66
- Onboard storage (up to 32GB)
- (-S) Audio I/O, Alarm I/O

Dimensions

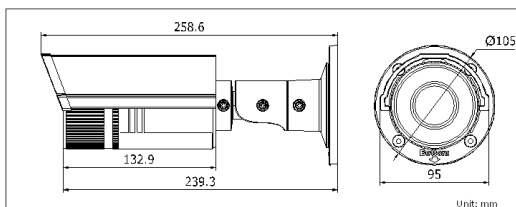

DS-2CD2632F-I (S)	
Camera	
Image sensor	1/3" progressive scan CMOS
Min. illumination	0.7 lux@F1.2, AGC on 0 lux with IR
Shutter time	1/25s (1/30s) ~ 1/100,000s
Lens	2.8 ~ 12 mm @F1.4, angle of view: 98° ~ 30.5°
Lens mount	Φ14
Day & night	ICR
Digital noise reduction	3D DNR
Wide dynamic range	Digital WDR
Backlight compensation	Yes, zone configurable
Compression standard	
Video compression	H.264 / MJPEG
H.264 compression profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Audio compression (-S)	G.711 / G.726
Audio bit rate (-S)	64Kbps (G.711) / 16Kbps (G.726)
Image	
Max. image resolution	2048 x 1536
Frame rate	50Hz: 12.5fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1280 x 720) 60Hz: 15fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
System compatibility	ONVIF, PSIA, CGI
General functionalities	User authentication, watermark, dual stream
Interface	
Communication interface	1 RJ45 10M / 100M ethernet port
On-board storage	Built-in Micro SD card slot, up to 32 GB
General	
Operating conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F), humidity 95% or less (non-condensing)
Power supply	DC12V ± 10%, PoE (802.3af)
Power consumption	Max. 5.5W (7.5W with ICR on)
Ingress protection level	IP66
IR range	Up to 30m
Dimensions	95 x 105 x 258.6 mm
Weight	1200g

Available models

DS-2CD2632F-I, DS-2CD2632F-IS

* -S: 1-ch audio interface (Mic IN), 1-ch alarm interface and 1-ch RS-485 interface.

* Product picture and technical specs subject to change without previous notice. For further information, please contact our local sales representatives.